


receptacle_with_break_away_and_push_pull_locking_for_front_panel_mounting

size: 1, IP50, keying: c, number_of_contacts: 5, solder_cup, contact_type: sockets, Signal



Basic information

| | |
|--------------------|----------------------|
| Part number | G11MC7-P05LJG0-0060 |
| Category | connector |
| Type of connector | receptacle |
| Assembly situation | front_panel_mounting |
| Size | 1 |

Contact insert description

| | |
|------------------------|-----------------------------|
| Special features | iec_60601_1_1_mopp_&_2_moop |
| Transmission type | Signal |
| Number of contacts | 5 |
| Contact type | sockets |
| Contact diameter | 0.9 mm |
| Termination type | solder_cup |
| Termination diameter | 0.85 mm |
| Wire cross section AWG | AWG 22 |

Technical information

| | | |
|--|-----------------------------|--|
| Nominal current single contact | 7.5 A | IEC 60512-5-2:2002 (DIN EN 60512-5-2:2003) |
| Max. current insert | 5.625 | VDE 0298-4:2003 |
| Test voltage | 1.05 kV AC | EIA-364-20F:2019-02 |
| Max. creepage distance (contact to contact) | 0.8 mm (Contact to housing) | |
| Max. creepage distance (contact to housing) | IEC 60601-1: 1MOPP. 2MOPP* | |
| Max. clearance distance (contact to contact) | 0.8 mm (Contact to contact) | |
| Max. clearance distance (contact to housing) | IEC 60601-1: 1MOPP. 2MOPP* | |

Mechanical and environmental data

| | |
|----------------------------|------------------------|
| Locking principle | break_away , push_pull |
| Keying | coding_60° |
| Mating cycles | 2.000 |
| IP class | IP50 |
| Max. operating temperature | 120 °C |
| Min. operating temperature | -50 °C |
| Weight | 5.32 g |


Material and surface treatments

| | |
|----------------------------------|----------|
| Material | psu_gray |
| Contact material | gold |
| Color option (Front or back nut) | blue |

Insulator materials MEDI-SNAP®

psu_peek_o_a

Graphics and technical drawings

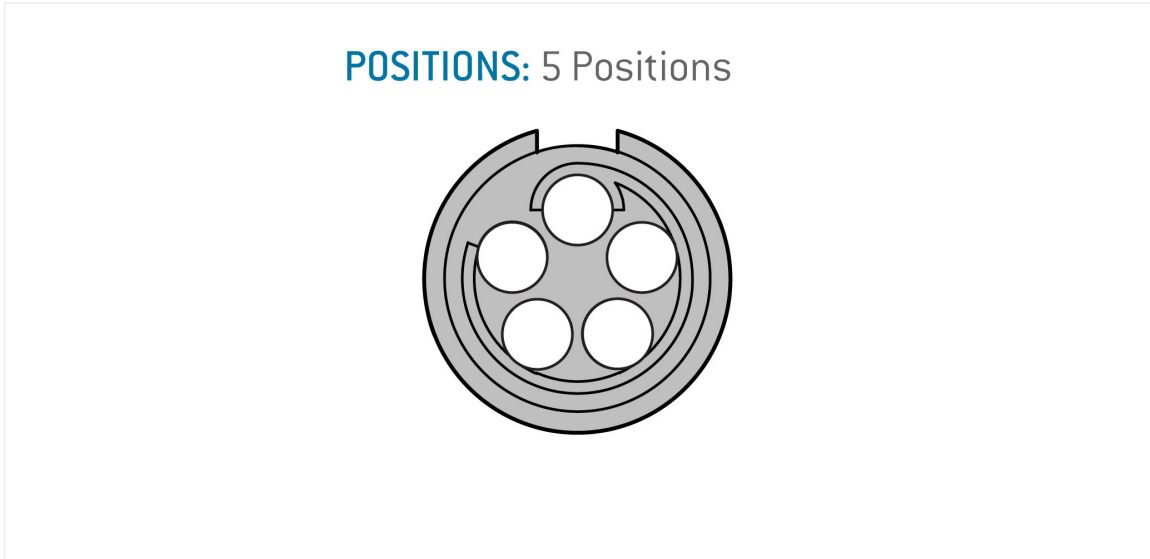

Further technical information and downloads

[3D-File \(STP File\)](#)