

receptacle_with_break_away_and_push_pull_locking_for_front_and_rear_panel_mounting_with_cable_outlet

size: 0, IP50, keying: a, number_of_contacts: 4, pcb, contact_type: sockets, Ethernet/IP® (100 Mbit/s)|USB® 2.0 (480 Mbit/s)

**Basic information**

Part number	G50LAC-P04QF00-0000
Category	connector
Type of connector	receptacle
Assembly situation	front_panel_mounting, rear_panel_mounting

Contact insert description

Special features	data_transmission
Transmission type	Ethernet/IP® (100 Mbit/s) , USB® 2.0 (480 Mbit/s)
Number of contacts	4
Contact type	sockets
Contact diameter	0.7 mm
Termination type	pcb
Termination diameter	0.5 mm

Technical information

Nominal current single contact	6 A	IEC 60512-5-2:2002 (DIN EN 60512-5-2:2003)
Max. current insert	6	VDE 0298-4:2003
Test voltage	0.9 kV AC	SAE AS 13441:1998 method 3001.1
Max. creepage distance (contact to contact)	0.8 mm (Contact to housing)	
Max. creepage distance (contact to housing)	1.0 mm (Contact to housing)	
Max. clearance distance (contact to contact)	0.8 mm (Contact to contact)	
Max. clearance distance (contact to housing)	1.0 mm (Contact to housing)	


Mechanical and environmental data

Locking principle	break_away , push_pull
Keying	coding_30°
Mating cycles	5.000
IP class	IP50
Max. operating temperature	120 °C
Min. operating temperature	-40 °C
Tightening torque	1.3 Nm
Weight	4.7 g


Material and surface treatments

Material	cu_alloy_with_chrome_finish
Contact material	cu_alloy_with_gold_finish


DIMENSIONS




CODING: 30 °




POSITIONS: 4 Positions



Contact borehole: $\varnothing 0.6$ mm



PANEL CUT OUT:

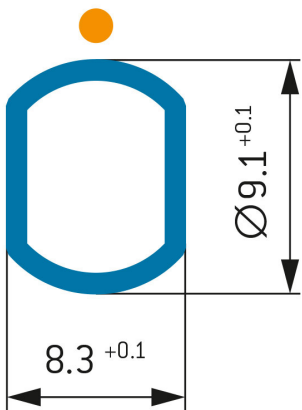

Further technical information and downloads

Connection diagram	connection_diagram_04_pin_usb_2_0_typ_a
--------------------	---

[3D-File \(STP File\)](#)

Technical specifications
--