

receptacle_with_break_away_and_push_pull_locking_for_front_panel_mounting

size: 1, IP68, keying: 0, number_of_contacts: 5, crimp, contact_type: sockets, Signal



Basic information

Part number	GA1M08-P05NJG0-0000
Category	connector
Type of connector	receptacle
Assembly situation	front_panel_mounting
Size	1

Contact insert description

Transmission type	Signal
Number of contacts	5
Contact type	sockets
Contact diameter	0.9 mm
Termination type	crimp
Wire cross section AWG	AWG 22 – 26

Technical information

Nominal current single contact	7.5 A	IEC 60512-5-2:2002 (DIN EN 60512-5-2:2003)
Max. current insert	5.625	VDE 0298-4:2003
Test voltage	1.05 kV AC	EIA-364-20F:2019-02
Max. creepage distance (contact to contact)	0.8 mm (Contact to housing)	
Max. clearance distance (contact to contact)	0.8 mm (Contact to contact)	

Mechanical and environmental data


Locking principle	break_away , push_pull
Mating cycles	5000
IP class	IP68
Max. operating temperature	120 °C
Min. operating temperature	50 °C

Material and surface treatments


Material	psu_black
Insulator material	peek
Contact material	cu_alloy_with_gold_finish

Insulator materials MEDI-SNAP®


psu_peek_o_a

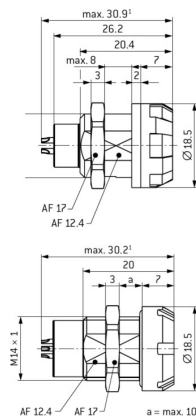

CODING: 0°



POSITIONS: 5 Positions



PANEL CUT OUT:

