

straight_in_line_receptacle_with_break_away_and_push_pull_locking

size: 1, IP50, keying: 0, number_of_contacts: 4, solder_cup, contact_type: sockets, Ethernet/IP®
[100 Mbit/s]



Basic information

| | |
|--------------------|---------------------|
| Part number | K11LOC-P04LJG0-6200 |
| Category | connector |
| Type of connector | in_line_receptacle |
| Assembly situation | straight |
| Size | 1 |

Contact insert description

| | |
|------------------------|---------------------------|
| Special features | data_transmission |
| Transmission type | Ethernet/IP® [100 Mbit/s] |
| Number of contacts | 4 |
| Contact type | sockets |
| Contact diameter | 0.9 mm |
| Termination type | solder_cup |
| Termination diameter | 0.85 mm |
| Wire cross section AWG | AWG 22 |

Technical information

| | | |
|--|-----------------------------|--|
| Nominal current single contact | 7.5 A | IEC 60512-5-2:2002 (DIN EN 60512-5-2:2003) |
| Max. current insert | 7.5 | VDE 0298-4:2003 |
| Test voltage | 1.5 kV AC | SAE AS 13441:1998 method 3001.1 |
| Max. creepage distance (contact to contact) | 1 mm (Contact to housing) | |
| Max. creepage distance (contact to housing) | 1.4 mm (Contact to housing) | |
| Max. clearance distance (contact to contact) | 1.0 mm (Contact to contact) | |
| Max. clearance distance (contact to housing) | 1.4 mm (Contact to housing) | |

Cable description

| | |
|---------------------|----------|
| Cable outlet | back_nut |
| Min. cable diameter | 5 |
| Max. cable diameter | 6.2 |


Mechanical and environmental data

| | |
|----------------------------|------------------------|
| Locking principle | break_away , push_pull |
| Mating cycles | 5.000 |
| IP class | IP50 |
| Max. operating temperature | 120 °C |
| Min. operating temperature | -40 °C |
| Weight | 17.62 g |

Material and surface treatments

| | |
|------------------|----------------------------------|
| Material | cu_alloy_with_matt_chrome_finish |
| Contact material | cu_alloy_with_gold_finish |


DIMENSIONS

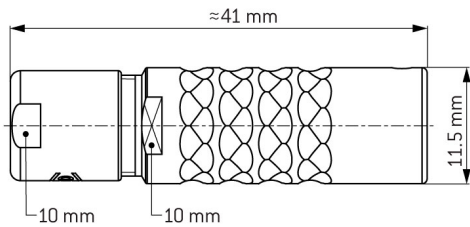

CODING: 0°



POSITIONS: 4 Positions

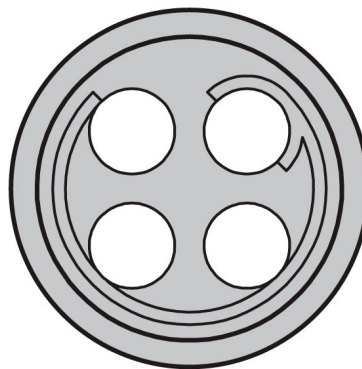

Further technical information and downloads

Connection diagram

[connection_diagram_4_pin_ethernet_100Mbps_rj45](#)

[3D-File \(STP File\)](#)

[Technical specifications](#)