

## S10LAC-P10BMM9-4200

odu\_mini\_snap®\_series\_l

### straight\_push\_pull\_plug

size: 0, IP50, keying: a, number\_of\_contacts: 10, solder\_cup, contact\_type: pins, USB® 3.2 Gen 1x1 (5 Gbit/s)



#### Basic information

Part number	S10LAC-P10BMM9-4200
Category	connector
Type of connector	plug
Assembly situation	straight

#### Contact insert description

Special features	data_transmission
Transmission type	USB® 3.2 Gen 1x1 (5 Gbit/s)
Number of contacts	10
Contact type	pins
Contact diameter	0.3 mm; 0.5 mm
Termination type	solder_cup
Termination diameter	0.45 mm; 0.7 mm
Wire cross section AWG	AWG 28; AWG 24

#### Technical information

Nominal current single contact	5 A	IEC 60512-5-2:2002 (DIN EN 60512-5-2:2003)
Test voltage	0.6 kV AC	SAE AS 13441:1998 method 3001.1
Max. creepage distance (contact to contact)	0.3 mm (Contact to housing)	
Max. creepage distance (contact to housing)	0.6 mm (Contact to housing)	
Max. clearance distance (contact to contact)	0.3 mm (Contact to contact)	
Max. clearance distance (contact to housing)	0.6 mm (Contact to housing)	

#### Cable description

Cable outlet	back_nut
Min. cable diameter	3
Max. cable diameter	4.2


## Mechanical and environmental data

Locking principle	push_pull
Keying	a
Mating cycles	5000
IP class	IP50
Max. operating temperature	120 °C
Min. operating temperature	-40 °C

## Material and surface treatments

Material	cu_alloy_with_matt_chrome_finish
Insulator material	peek
Contact material	cu_alloy_with_gold_finish


## DIMENSIONS

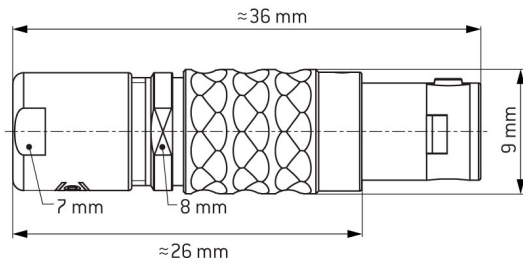

## CODING: 30°



## POSITIONS: 10 Positions

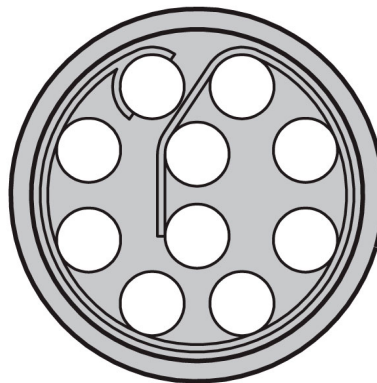

### Further technical information and downloads

[Connection diagram](#)

[connection\\_diagram\\_10\\_pin\\_usb\\_3\\_2\\_gen1x1\\_pin\\_typ\\_a](#)

[3D-File \(STP File\)](#)

[Assembly Instruction](#)

[Technical specifications](#)