

## S12LAC-P12PFG0-7200

odu\_mini\_snap®\_series\_l

### straight\_push\_pull\_plug

size: 2, IP50, keying: a, number\_of\_contacts: 12, crimp, contact\_type: pins, Signal

ODU EXPRESS



#### Basic information

Part number	S12LAC-P12PFG0-7200
Category	connector
Type of connector	plug
Assembly situation	straight
Size	2

#### Contact insert description

Transmission type	Signal
Number of contacts	12
Contact type	pins
Contact diameter	0.7 mm
Termination type	crimp
Termination diameter	0 mm
Wire cross section AWG	AWG 22 – 26

#### Crimp contacts

Please refer to the installed contacts for the correct crimp settings and the tools to be used.

[185.409.000.207.000](https://www.odu.com/185.409.000.207.000)

#### Technical information

Nominal current single contact	7.5 A	IEC 60512-5-2:2002 (DIN EN 60512-5-2:2003)
Max. current insert	4.125	VDE 0298-4:2003
Test voltage	1.2 kV AC	SAE AS 13441:1998 method 3001.1
Max. creepage distance (contact to contact)	0.8 mm (Contact to housing)	
Max. creepage distance (contact to housing)	1.1 mm (Contact to housing)	
Max. clearance distance (contact to contact)	0.8 mm (Contact to contact)	
Max. clearance distance (contact to housing)	1.1 mm (Contact to housing)	

## Cable description

Cable outlet	back_nut
Min. cable diameter	6
Max. cable diameter	7.2

## Mechanical and environmental data

Locking principle	push_pull
Keying	coding_30°
Mating cycles	5.000
IP class	IP50
Max. operating temperature	120 °C
Min. operating temperature	-40 °C
Weight	26.33 g

## Material and surface treatments

Material	cu_alloy_with_matt_chrome_finish
Contact material	cu_alloy_with_gold_finish

## Graphics and technical drawings


### DIMENSIONS:



### CODING: 30°



### POSITIONS: 12 positions

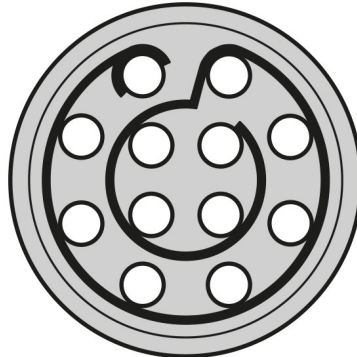

## Further technical information and downloads

[3D-File \[STP File\]](#)

[Assembly Instruction](#)

[Technical specifications](#)