S21K0C-P03LPN0-700S


$series_k$

type_s2



General information

Part number	S21K0C-P03LPN0-700S	
Termination	solder	
Size	1	
Locking principle	push	
Coding	0 __ key	Illustrations may differ from original product. Dimensions, unless otherwise specified, in mm.
Cable Diameter	cable_mini_70	bilitetisions, unless otherwise specified, in film.
Cable outlet	bend relief	

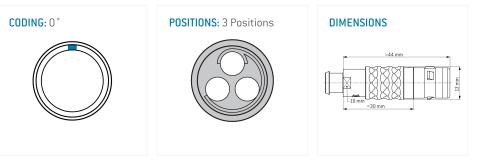

The pin layout corresponds to the view on the termination area

Contact insert description

Number of contacts	3
Contact type	sockets
Contact diameter	13mm
Insulator material	peek
Wire cross section	18_awg
Termination	solder
Termination diameter	14mm

reverse_gender_on_request

Technical information

Max. creepage and air clearance distance	08 __ mm	06_mm
Nominal current single contact	15_a	iec_60512_5_2
Nominal current insert	15 A	vde_0298_4
Test voltage	1_kv_ac	sae_13441

S21K0C-P03LPN0-700S type_s2

safety_text

Mechanical and environmental data

Degree of protection*	ip68
Operating temperature	40_120_c
Mating cycles	5000

mated

Material and surface treatments

Housing	m_chrome
Contact	cu_alloy_gold

safety_text_2 ul_text illustrative_text