

**straight\_push\_pull\_plug\_for\_bend\_relief**

size: 1, IP68, keying: a, number\_of\_contacts: 4, solder\_cup, contact\_type: pins, Ethernet/IP® (100 Mbit/s)

**Basic information**

|                    |                     |
|--------------------|---------------------|
| Part number        | S21KAC-P04MJG0-700S |
| Category           | connector           |
| Type of connector  | plug                |
| Assembly situation | straight            |
| Size               | 1                   |

**Contact insert description**

|                        |                           |
|------------------------|---------------------------|
| Special features       | data_transmission         |
| Transmission type      | Ethernet/IP® (100 Mbit/s) |
| Number of contacts     | 4                         |
| Contact type           | pins                      |
| Contact diameter       | 0.9 mm                    |
| Termination type       | solder_cup                |
| Termination diameter   | 0.85 mm                   |
| Wire cross section AWG | AWG 22                    |

**Technical information**

|                                              |                             |                                            |
|----------------------------------------------|-----------------------------|--------------------------------------------|
| Nominal current single contact               | 7.5 A                       | IEC 60512-5-2:2002 (DIN EN 60512-5-2:2003) |
| Max. current insert                          | 7.5                         | VDE 0298-4:2003                            |
| Test voltage                                 | 1.5 kV AC                   | SAE AS 13441:1998 method 3001.1            |
| Max. creepage distance (contact to contact)  | 1 mm (Contact to housing)   |                                            |
| Max. creepage distance (contact to housing)  | 1.1 mm (Contact to housing) |                                            |
| Max. clearance distance (contact to contact) | 1.0 mm (Contact to contact) |                                            |
| Max. clearance distance (contact to housing) | 1.1 mm (Contact to housing) |                                            |

**Cable description**

|                     |                   |
|---------------------|-------------------|
| Cable outlet        | cable_bend_relief |
| Min. cable diameter | 6.5               |
| Max. cable diameter | 7                 |

**Mechanical and environmental data**


|                            |            |
|----------------------------|------------|
| Locking principle          | push_pull  |
| Keying                     | coding_30° |
| Mating cycles              | 5.000      |
| IP class                   | IP68       |
| Max. operating temperature | 120 °C     |
| Min. operating temperature | -40 °C     |
| Weight                     | 22.65 g    |

ip\_protection\_class\_refers\_to\_mated\_condition


**Material and surface treatments**

|                  |                                  |
|------------------|----------------------------------|
| Material         | cu_alloy_with_matt_chrome_finish |
| Contact material | cu_alloy_with_gold_finish        |


## DIMENSIONS

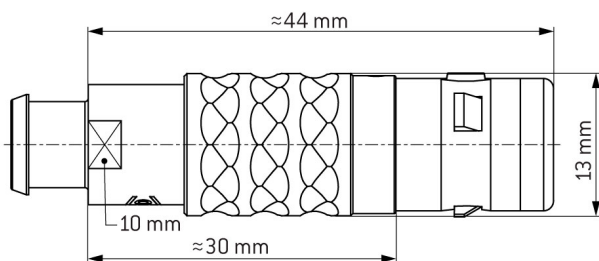

## CODING: 30°

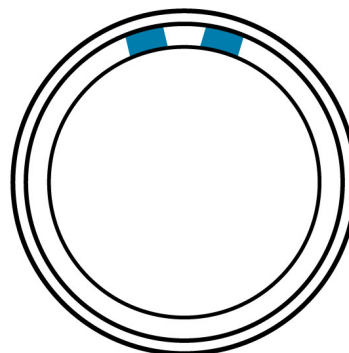

## POSITIONS: 4 Positions

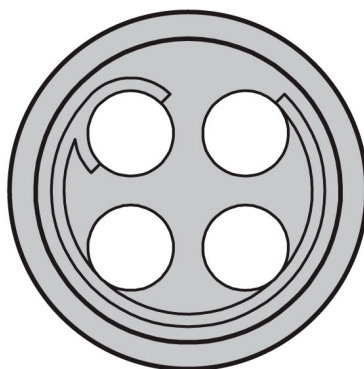

### Further technical information and downloads

Connection diagram

[connection\\_diagram\\_4\\_pin\\_ethernet\\_100Mbps\\_rj45](#)

[3D-File \(STP File\)](#)

[Assembly Instruction](#)

[Technical specifications](#)