
S22L0C-P04MPH0-820S

series_l

type_s2

General information

Termination solder	
Size 2	
Locking principle push	
Coding 0_key Illustrations may differ from original prod Dimensions, unless otherwise specified,	
Cable Diameter cable_mini_82	
Cable outlet bend_relief	

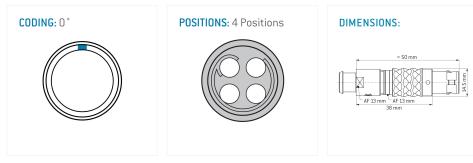

The pin layout corresponds to the view on the termination area

Contact insert description

Number of contacts	4
Contact type	pins
Contact diameter	13mm
Insulator material	peek
Wire cross section	20_awg
Termination	solder
Termination diameter	11mm
Data transmission	ethernet_100

reverse_gender_on_request

Technical information

Max. creepage and air clearance distance	18_mm	16_mm
Nominal current single contact	12_a	iec_60512_5_2
Nominal current insert	12 A	vde_0298_4
Test voltage	195_kv_ac	sae_13441
a fatu taut		

safety_text

Mechanical and environmental data

Degree of protection*	ip50
Operating temperature	40_120_c
Mating cycles	5000

mated_unmated

Material and surface treatments

Housing	m_chrome
Contact	cu_alloy_gold

safety_text_2 data_text ul_text illustrative_text