

## straight\_push\_pull\_plug\_for\_bend\_relief

size: 2, IP50, keying: a, number\_of\_contacts: 5, solder\_cup, contact\_type: pins, Signal



### Basic information

|                    |                     |
|--------------------|---------------------|
| Part number        | S22LAC-P05MPHO-820S |
| Category           | connector           |
| Type of connector  | plug                |
| Assembly situation | straight            |
| Size               | 2                   |

### Contact insert description

|                        |            |
|------------------------|------------|
| Transmission type      | Signal     |
| Number of contacts     | 5          |
| Contact type           | pins       |
| Contact diameter       | 1.3 mm     |
| Termination type       | solder_cup |
| Termination diameter   | 1.1 mm     |
| Wire cross section AWG | AWG 20     |

### Technical information

|  |                             |  |
|--|-----------------------------|--|
| Nominal current single contact               | 12 A                        | IEC 60512-5-2:2002 (DIN EN 60512-5-2:2003) |
| Max. current insert                          | 9                           | VDE 0298-4:2003                            |
| Test voltage                                 | 1.8 kV AC                   | SAE AS 13441:1998 method 3001.1            |
| Max. creepage distance (contact to contact)  | 1.6 mm (Contact to housing) |  |
| Max. creepage distance (contact to housing)  | 1.7 mm (Contact to housing) |  |
| Max. clearance distance (contact to contact) | 1.6 mm (Contact to contact) |  |
| Max. clearance distance (contact to housing) | 1.7 mm (Contact to housing) |  |

### Cable description

|                     |                   |
|---------------------|-------------------|
| Cable outlet        | cable_bend_relief |
| Min. cable diameter | 7                 |
| Max. cable diameter | 8.2               |

## Mechanical and environmental data

|                            |            |
|----------------------------|------------|
| Locking principle          | push_pull  |
| Keying                     | coding_30° |
| Mating cycles              | 5.000      |
| IP class                   | IP50       |
| Max. operating temperature | 120 °C     |
| Min. operating temperature | -40 °C     |
| Weight                     | 27 g       |

## Material and surface treatments

|                  |                                  |
|------------------|----------------------------------|
| Material         | cu_alloy_with_matt_chrome_finish |
| Contact material | gold                             |


## DIMENSIONS:



## CODING: 30°



## POSITIONS: 5 Positions

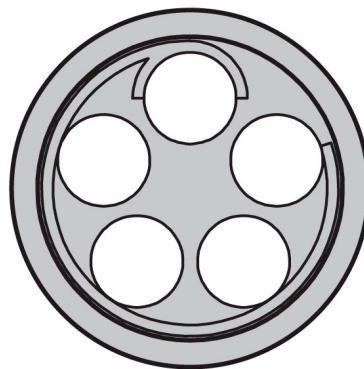

### Further technical information and downloads

[3D-File \[STP File\]](#)

[Assembly Instruction](#)

[Technical specifications](#)