

**right\_angled\_push\_pull\_plug**

size: 1, IP50, keying: a, number\_of\_contacts: 4, crimp, contact\_type: pins, Ethernet/IP® (100 Mbit/s)

**Basic information**

Part number	W11LAC-P04PJH0-7200
Category	connector
Type of connector	right_angled_plug
Assembly situation	right_angled
Size	1

**Contact insert description**

Special features	data_transmission
Transmission type	Ethernet/IP® (100 Mbit/s)
Number of contacts	4
Contact type	pins
Contact diameter	0.9 mm
Termination type	crimp
Wire cross section AWG	AWG 20 – 24

**Crimp contacts**

Please refer to the installed contacts for the correct crimp settings and the tools to be used.

[185.539.000.207.000](https://www.odu.com/185.539.000.207.000)
**Technical information**

Nominal current single contact	10 A	IEC 60512-5-2:2002 (DIN EN 60512-5-2:2003)
Max. current insert	10	VDE 0298-4:2003
Test voltage	1 kV AC	SAE AS 13441:1998 method 3001.1
Max. creepage distance (contact to contact)	0.7 mm (Contact to housing)	
Max. creepage distance (contact to housing)	1.1 mm (Contact to housing)	
Max. clearance distance (contact to contact)	0.7 mm (Contact to contact)	
Max. clearance distance (contact to housing)	1.1 mm (Contact to housing)	

## Cable description

Cable outlet	back_nut
Min. cable diameter	6
Max. cable diameter	7.2

## Mechanical and environmental data


Locking principle	push_pull
Keying	a
Mating cycles	5000
IP class	IP50
Max. operating temperature	120 °C
Min. operating temperature	-40 °C

## Material and surface treatments

Material	cu_alloy_with_matt_chrome_finish
Insulator material	peek
Contact material	cu_alloy_with_gold_finish

## Graphics and technical drawings

### DIMENSIONS:

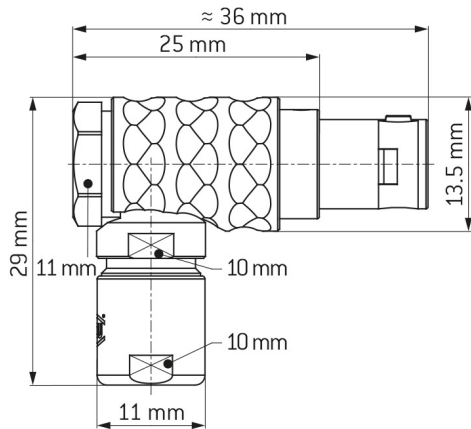

### CODING: 30°



### POSITIONS: 4 Positions



## Further technical information and downloads

[Connection diagram](#)

[connection\\_diagram\\_4\\_pin\\_ethernet\\_100Mbps\\_rj45](#)

[3D-File \(STP File\)](#)

[Assembly Instruction](#)

[Technical specifications](#)