

straight_in_line_receptacle_with_break_away_push_pull_and_screw_lock_for_bend_relief

size: 9 [STD 38999], IP6K8 / IP6K9K, keying: a, number_of_contacts: 10, crimp, contact_type: sockets, Signal



Basic information

Part number	K1TAATO-E010SN-0000
Category	connector
Type of connector	in_line_receptacle
Assembly situation	straight
Size	9 [STD 38999]

Contact insert description

Transmission type	Signal
Number of contacts	10
Contact type	sockets
Contact diameter	0.76 mm
Termination type	crimp
Wire cross section AWG	AWG 22 – 26

Crimp contacts

Please refer to the installed contacts for the correct crimp settings and the tools to be used.

[923.000.005.000.292](https://www.odu.com/923.000.005.000.292)

Technical information

Max. current single contact	5 A	IEC 60512-5-2:2002 (DIN EN 60512-5-2:2003)
Test voltage	0.75 kV AC	EIA-364-20F:2019-02

Cable description

Cable outlet	overmolding
Min. cable diameter	3
Max. cable diameter	7.6

Mechanical and environmental data


Locking principle	break_away , push_pull , screw_lock
Keying	a
Mating cycles	500
IP class	IP6K8 / IP6K9K
Max. operating temperature	175 °C
Min. operating temperature	-65 °C
Weight	10.97 g

ip_protection_class_refers_to_mated_condition


Material and surface treatments

Material	aluminum_with_tin_nickel_finish
Contact material	gold


DIMENSIONS:

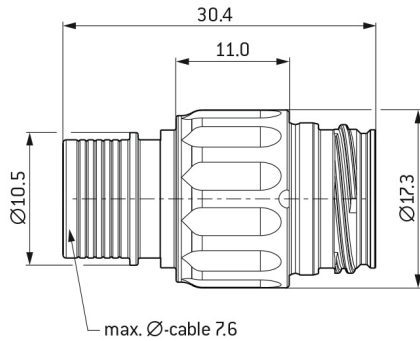

CODING:A

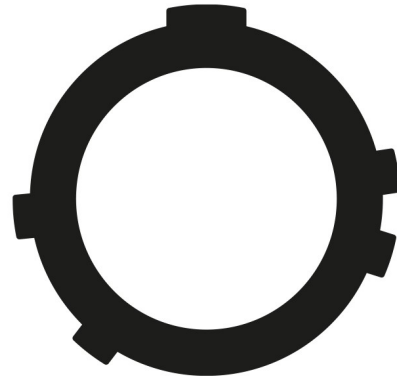

POSITIONS: 10 positions

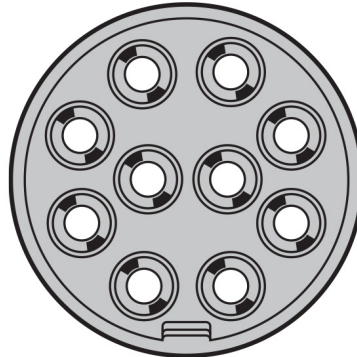

Further technical information and downloads

[3D-File \[STP File\]](#)

[Assembly Instruction](#)