

**straight\_in\_line\_receptacle\_with\_break\_away\_and\_push\_pull\_locking\_for\_bend\_relief**

size: 1, IP50, keying: 0, number\_of\_contacts: 8, solder\_cup, contact\_type: sockets, Ethernet/IP® (1 Gbit/s)



**Basic information**

Part number	K21LOC-PD8LCD0-720S
Category	connector
Type of connector	in_line_receptacle
Assembly situation	straight
Size	1

**Contact insert description**

Special features	data_transmission
Transmission type	Ethernet/IP® (1 Gbit/s)
Number of contacts	8
Contact type	sockets
Contact diameter	0.5 mm
Termination type	solder_cup
Termination diameter	0.65 mm
Wire cross section AWG	AWG 26

**Technical information**

Nominal current single contact	6 A	IEC 60512-5-2:2002 (DIN EN 60512-5-2:2003)
Max. current insert	3.9	VDE 0298-4:2003
Test voltage	1 kV AC	SAE AS 13441:1998 method 3001.1
Max. creepage distance (contact to contact)	0.5 mm (Contact to housing)	
Max. creepage distance (contact to housing)	1.0 mm (Contact to housing)	
Max. clearance distance (contact to contact)	0.5 mm (Contact to contact)	
Max. clearance distance (contact to housing)	1.0 mm (Contact to housing)	

## Cable description

Cable outlet	cable_bend_relief
Min. cable diameter	6
Max. cable diameter	7.2


## Mechanical and environmental data

Locking principle	break_away , push_pull
Mating cycles	5000
IP class	IP50
Max. operating temperature	120 °C
Min. operating temperature	-40 °C

## Material and surface treatments

Material	cu_alloy_with_matt_chrome_finish
Insulator material	peek
Contact material	cu_alloy_with_gold_finish


## DIMENSIONS

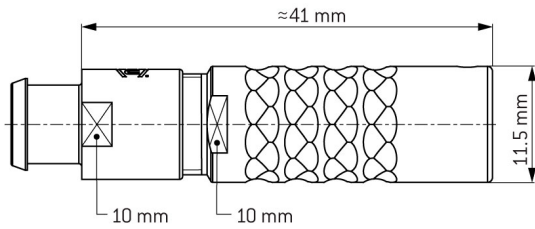

## CODING: 0°



## POSITIONS: 8 positions

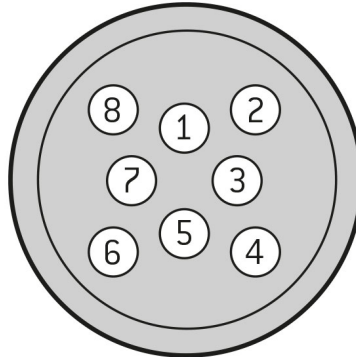

### Further technical information and downloads

Connection diagram

[connection\\_diagram\\_8\\_pin\\_ethernet\\_1gbs\\_10gbs\\_rj45](#)

[3D-File \(STP File\)](#)

[Technical specifications](#)