

**straight\_push\_pull\_plug**

size: 1, IP50, keying: c, number\_of\_contacts: 14, solder\_cup, contact\_type: pins, Signal

**Basic information**

|                    |                     |
|--------------------|---------------------|
| Part number        | S11MCC-P14MCC0-6530 |
| Category           | connector           |
| Type of connector  | plug                |
| Assembly situation | straight            |
| Size               | 1                   |

**Contact insert description**

|                        |            |
|------------------------|------------|
| Transmission type      | Signal     |
| Number of contacts     | 14         |
| Contact type           | pins       |
| Contact diameter       | 0.5 mm     |
| Termination type       | solder_cup |
| Termination diameter   | 0.45 mm    |
| Wire cross section AWG | AWG 28     |

**Technical information**

|  |                             |  |
|--|-----------------------------|--|
| Max. current single contact                  | 4 A                         | IEC 60512-5-2:2002 (DIN EN 60512-5-2:2003) |
| Max. current insert                          | 2                           | VDE 0298-4:2003                            |
| Test voltage                                 | 0.7 kV AC                   | EIA-364-20F:2019-02                        |
| Max. creepage distance (contact to contact)  | 0.5 mm (Contact to housing) |  |
| Max. clearance distance (contact to contact) | 0.5 mm (Contact to contact) |  |

**Cable description**

|                     |          |
|---------------------|----------|
| Cable outlet        | back_nut |
| Min. cable diameter | 5.3      |
| Max. cable diameter | 6.5      |

## Mechanical and environmental data

|                            |           |
|----------------------------|-----------|
| Locking principle          | push_pull |
| Keying                     | c         |
| Mating cycles              | 2000      |
| IP class                   | IP50      |
| Max. operating temperature | 120 °C    |
| Min. operating temperature | 50 °C     |

## Material and surface treatments

|                                  |                                  |
|----------------------------------|----------------------------------|
| Material                         | cu_alloy_with_matt_chrome_finish |
| Insulator material               | peek                             |
| Contact material                 | cu_alloy_with_gold_finish        |
| Color option (Front or back nut) | white                            |


## DIMENSIONS



## CODING: 60°



## POSITIONS: 14 Positions

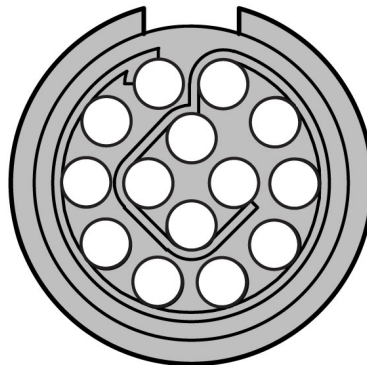

### Further technical information and downloads

[3D-File \[STP File\]](#)

[Assembly Instruction](#)