

straight_push_pull_plug_for_bend_relief

size: 1, IP64, keying: a, number_of_contacts: 3, solder_cup, contact_type: sockets



Basic information

Part number	S41MA7-P03LJN0-397S
Category	connector
Type of connector	plug
Assembly situation	straight
Size	1

Contact insert description

Special features	high_voltage , iec_60601_1_2_mopp_&_2_moop
Number of contacts	3
Contact type	sockets
Contact diameter	0.9 mm
Termination type	solder_cup
Termination diameter	1.4 mm
Wire cross section AWG	AWG 18

Technical information

Nominal current single contact	10 A	IEC 60512-5-2:2002 (DIN EN 60512-5-2:2003)
Max. current insert	10	VDE 0298-4:2003
Test voltage	mated: 3.5 kV AC; unmated 2.1 kV AC	EIA-364-20F:2019-02
Max. creepage distance (contact to contact)	mated: 4.7 mm; unmated: 2.0 mm (Contact to contact)	
Max. creepage distance (contact to housing)	IEC 60601-1: 2MOPP. 2MOOP*	
Max. clearance distance (contact to contact)	mated: 4.7 mm; unmated: 2.0 mm (Contact to contact)	
Max. clearance distance (contact to housing)	IEC 60601-1: 2MOPP. 2MOOP*	

safety_text_hv

Cable description

Cable outlet	cable_bend_relief
Min. cable diameter	2.7
Max. cable diameter	3.9

Mechanical and environmental data

Locking principle	push_pull
Keying	coding_40°
Mating cycles	2.000
IP class	IP64
Max. operating temperature	120 °C
Min. operating temperature	50 °C
Weight	5.46 g

ip_protection_class_refers_to_mated_condition

Material and surface treatments


Material	psu_gray
Contact material	cu_alloy_with_gold_finish
Color option (Front or back nut)	gray

Insulator materials MEDI-SNAP®
psu_peek


DIMENSIONS:



CODING: 40°

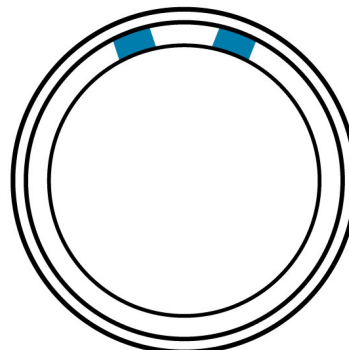

POSITIONS: 3 positions

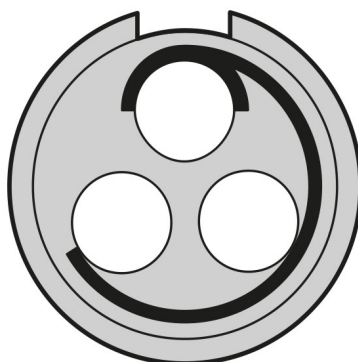

Further technical information and downloads

[3D-File \[STP File\]](#)

[Assembly Instruction](#)